


# UG65


## LoRaWAN<sup>®</sup> Gateway

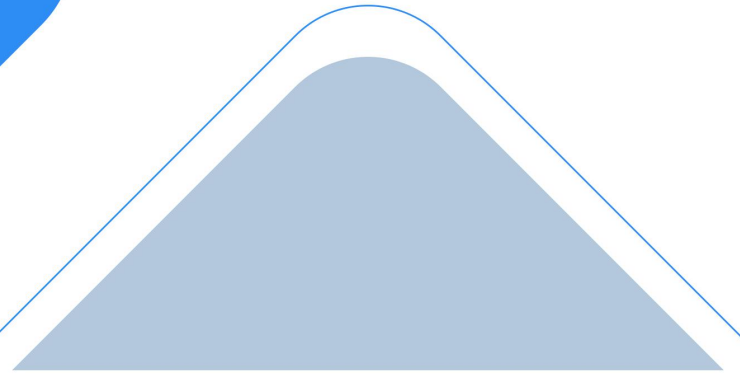

UG65 is a robust 8-channel indoor LoRaWAN<sup>®</sup> gateway. Adopting SX1302 LoRa chip and high-performance quad-core CPU, UG65 supports connection with more than 2000 nodes. UG65 has line of sight up to 15 km and can cover about 2 km in urbanized environment, which is ideally suited to smart office, smart building and many other indoor applications.

UG65 supports not only multiple back-haul backups with Ethernet, Wi-Fi and cellular, but also has integrated mainstream network servers (such as TTI, ChirpStack, etc.) and built-in network server and Milesight IoT Cloud for easy deployment.


### ◆ Application Example

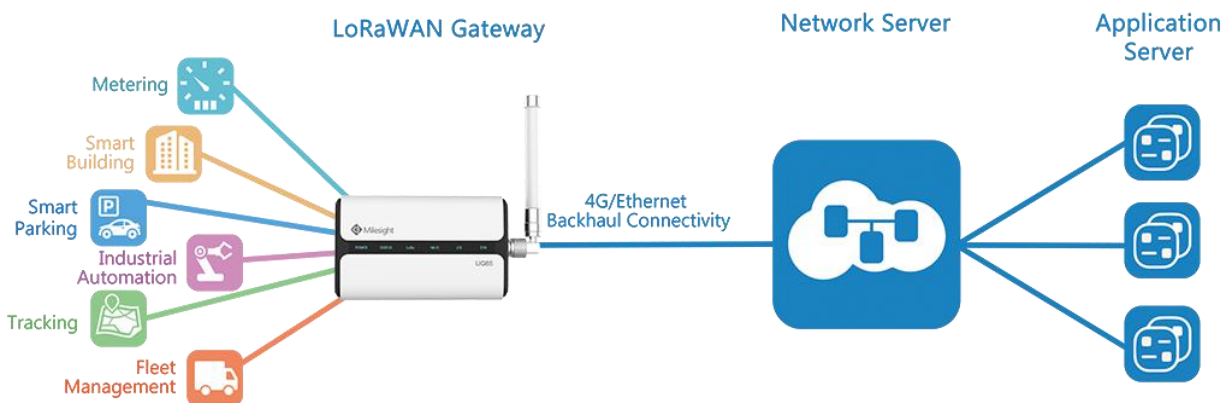

## ◆ Features

- Quad-core industrial processor with big memory
- Equip with SX1302 chip, handing a higher amount of traffic with lower consumption
- 8 half/full-duplex channels
- IP65 enclosure and industrial design for parts of outdoor environment applications like eaves
- Desktop, wall or pole mounting (optional)
- Multi backhaul backups with Ethernet, cellular (4G/3G) and Wi-Fi
- DeviceHub and Milesight IoT Cloud provide easy and centralized management of remote devices
- Enable security communication with multiple VPNs like IPsec/OpenVPN/L2TP/PPTP/DMVPN
- Compatible with mainstream network servers like The Things Industries, ChirpStack, etc.
- Detect and analyze the noise level and provide intuitive diagram for deployment
- Built-in network server and MQTT/HTTP/HTTPS API for easily integration
- Embedded Python SDK for users secondary development
- Fast and user-friendly programming by Node-RED development tool

## ◆ Dimensions(mm)

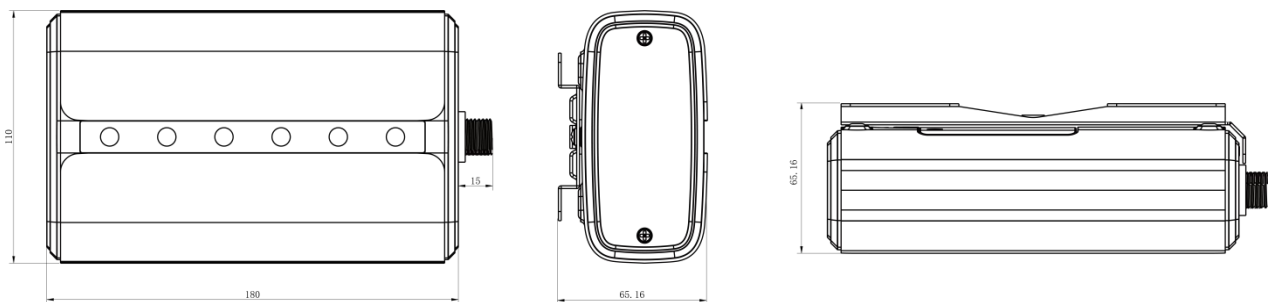

## ◆ Specifications

### Hardware System

CPU	Quad-core 1.5 GHz, 64-bit ARM Cortex-A53
Memory	512 MB DDR4 RAM
Flash	8 GB eMMC

### LoRaWAN

Antenna	2 × Internal Antennas ( Optional: 1 × 50 Ω N-Female External Connector )
Channel	8 (Half/Full-duplex)
Frequency Band	CN470/IN865/EU868/RU864/US915/AU915/KR920/AS923/AS923-2

Sensitivity	-140dBm Sensitivity @292bps
-------------	-----------------------------

Output Power	27dBm Max
--------------	-----------

Protocol	V1.0 Class A/Class B/Class C and V1.0.2 Class A/Class B/Class C
----------	---

### Ethernet Interface

Port	1 × RJ45 (PoE PD supported)
------	-----------------------------

Physical Layer	10/100/1000 Base-T (IEEE 802.3)
----------------	---------------------------------

Data Rate	10/100/1000 Mbps (Auto-Sensing)
-----------	---------------------------------

Interface	Auto MDI/MDIX
-----------	---------------

Mode	Full or Half Duplex (Auto-Sensing)
------	------------------------------------

### Wi-Fi Interface

Antenna	Internal Antenna
---------	------------------

Standards	IEEE 802.11 b/g/n, 2.4GHz
-----------	---------------------------

Mode	AP or Client mode
------	-------------------

Security	WPA/WPA2 authentication, WEP/TKIP/AES encryption
----------	--

Tx Power	802.11b: 18 dBm +/-2.0 dBm (11 Mbps)
	802.11g: 15 dBm +/-2.0 dBm (6 Mbps)
	802.11g: 15 dBm +/-2.0 dBm (54 Mbps)
	802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS0_HT20)
	802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS7_HT20)
	802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS0_HT40)
	802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS7_HT40)

### Cellular Interface (Optional)

Antenna	Internal Antenna
---------	------------------

SIM Slot	1 (mini SIM-2FF)
----------	------------------

### Others

Reset Button	1 × RST
--------------	---------

Console Port	1 × Type-C
--------------	------------

LED Indicators	1 × POWER, 1 × STATUS, 1 × LoRa, 1 × Wi-Fi, 1 × LTE, 1 × ETH
----------------	--

Built-in	Watchdog, RTC, Timer
----------	----------------------

### Software

Network Protocols	PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, DDNS, HTTP, HTTPS, DNS, ARP, SNTP, Telnet, SSH, MQTT, etc.
-------------------	---

VPN Tunnel	OpenVPN/IPsec/PPTP/L2TP/GRE/DMVPN
------------	-----------------------------------

Firewall	ACL/DMZ/Port Mapping/MAC Binding/URL Filter
----------	---

Management	Web, CLI, SMS, On-demand dial up, DeviceHub, Milesight IoT Cloud
------------	--

Reliability	WAN Failover
-------------	--------------

App	Python SDK, Node-RED
-----	----------------------

### Power Supply and Consumption

Power Input	1. DC Jack Connector for 9-24 VDC power supply 2. 1 × 802.3 af PoE input
-------------	---

Power Consumption	Typical 2.9 W, Max 4.2 W
-------------------	--------------------------

### Physical Characteristics

Ingress Protection	IP65
--------------------	------

Dimensions	180 x 110 x 56.5 mm (7.09 x 4.33 x 2.22 in)
------------	---

Installation	Desktop, Wall or Pole Mounting
--------------	--------------------------------

### Environmental

Operating Temperature	-40°C to +70°C (-40°F to +158°F)
-----------------------	----------------------------------

Storage Temperature	Reduced Cellular Performance Above 60°C
---------------------	---

Ethernet Isolation	1.5 kV RMS
--------------------	------------

Relative Humidity	0% to 95% (non-condensing) at 25°C/77°F
-------------------	---

